

Exit Device 4700 Series


You have selected part number:

4700 Series - Rim - Standard Duty


Submit



- Applications:** - Commercial, Standard Duty
- Certifications:** - UL/cUL Listed for up to 3 hours for "A" label single doors
- UL10C/UBC 7-2 (1997) Positive Pressure Rated
- UL10B Neutral Pressure Rated
- Hex dogging feature standard on non-fire labeled doors
- Fire-rated devices for use with mullion will be available end of first quarter 2007
- Trim:** - Outside Escutcheon Handed trim available
- (See Accessory chart in General Information)
- Covers:** - Painted Steel
- Brass
- Stainless Steel
- Chassis:** - Steel plated
- End Caps:** - Painted Steel
- Brass
- Stainless Steel
- Door Size:** - 36" field sizeable to 32"
- 48" field sizeable to 38" - Optional
- Door Thickness:** - 1 3/4"
- 4 1/8" - Minimum stile width required for single door applications
- 4 1/2" - Minimum stile width required for double door applications
- Fasteners:** - Wood and Machine screws
- Thru-bolts
- Latchbolt:** - 3/4" throw
- Stainless Steel with dead latch
- Strikes:** - Steel with plated rollers
- Surface applied to frame with slotted holes for easy adjustment
- Finishes:** - US3
- US20A
- US32D
- US28
- Functions:** - Cylinder Cut-Out 08
- Blank Escutcheon 14
- Night Latch 03
- Dummy 02

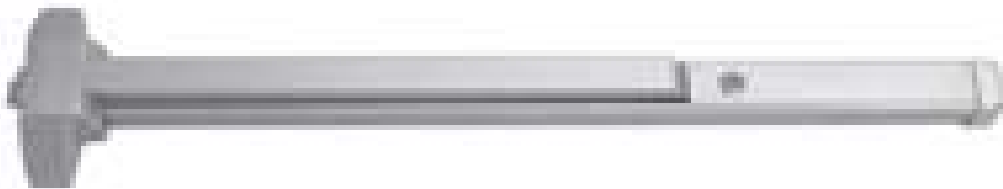

4700 RIM EXIT DEVICE TEMPLATE INSTRUCTIONS

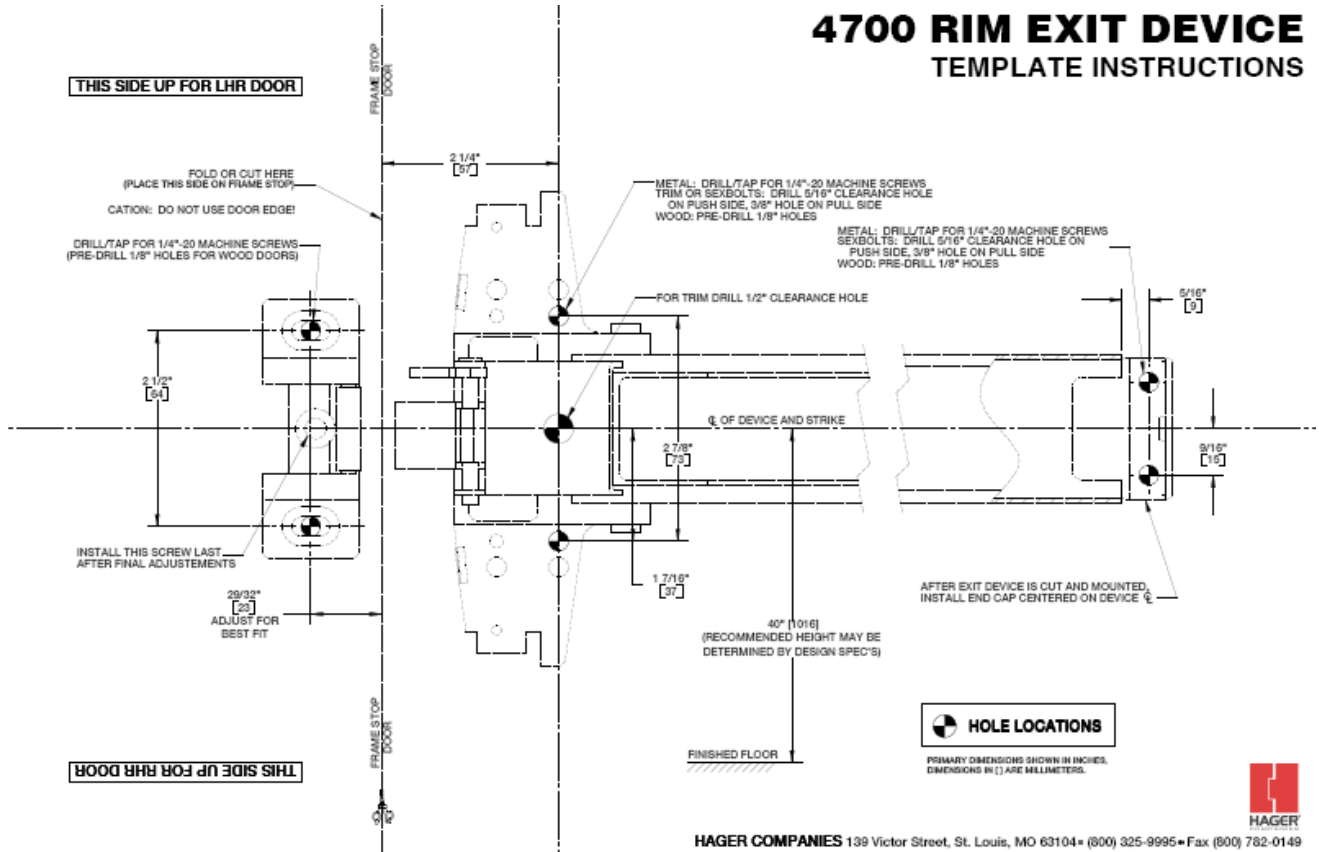

HAGER COMPANIES 139 Victor Street, St. Louis, MO 63104 • (800) 325-9995 • Fax (800) 782-0149

