

Pull Plates

You have selected part number:

31G

Submit

Description:

Square Corner Pull Plate
0.050" (1.3 mm) Gauge
Consists of a 30 Series plate combined with a 1 Series pull.
Meets ANSI A156.6 for J405 Pull Plate

- Standard Plate Sizes:**
- 3" (76 mm) x 12" (305 mm)
 - 3-1/2" (89 mm) x 15" (381 mm)
 - 4" (102 mm) x 16" (406 mm)
 - 6" (152 mm) x 16" (406 mm)
 - 8" (203 mm) x 16" (406 mm)
- Materials:** - Aluminum, Brass, Bronze, or Stainless Steel
- CTC Length:** - 8" (203 mm)
- Note:** - 2-1/2" (63mm) clearance available on special orders for pull plates. Add prefix "H" to pull plate number (i.e., H31G).

Pull Fasteners with Finish Washers	Plate Fasteners
1/4" x 20 Thru-bolts	#6 x 5/8" Oval head tapping screws

Additional Notes:

Finishes: All Standard, refer to the General Information section titled "[Finish Symbols](#)". (Clicking on the copy in red above will take you to the section.)


Options: Pull Plates may be ordered cut for cylinder cutout(cfc) or engraved "Pull". Refer to the General Information section titled "[Push/Pull Plate Details](#)" (Clicking on the copy in red above will take you to the section.)

Trim & Auxiliary Push/Pull Plate Details



Standard Grip Positions

Pulls are centered vertically or lowered when necessary to meet minimum top spacing requirement. Be certain pull selected will fit on specified plate under these conditions.

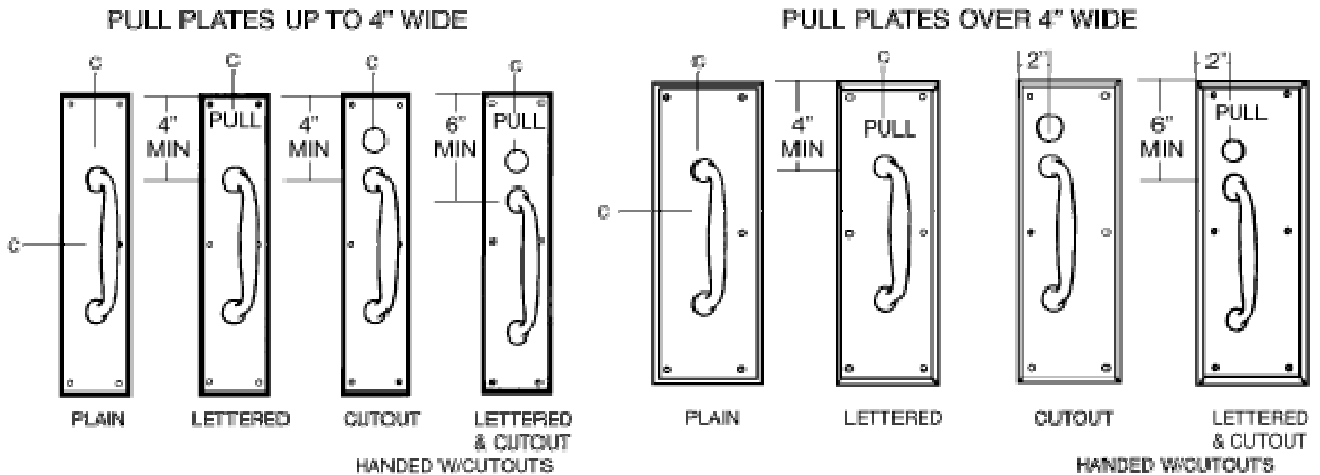

Special Pull Positions

Where pairs of doors are involved and active leaf pull plate is lettered or has a cutout, order pull plate for inactive leaf WOC. This will assure horizontal alignment of pull on both plates.

Always furnish complete details when ordering non-standard pull positions.

Cut Outs


Standard cutout sizes: CFC – 1 1/4" (32 mm) diameter; CFT – 3/8" (10 mm) diameter.

All plates may be ordered, with cutout option by adding the appropriate suffix (i.e., 303-CFC).

Standard cutouts are positioned 2" (51 mm) from top of plate where this option has been ordered. Cutouts are centered on plates up to 4" (102 mm) wide or 2" (51 mm) from edge of plates over 4" (102 mm) wide.

The latter are "handed" with cutouts. Furnish hand of door when ordering.

Provide complete details for all non-standard cutouts.



Flush Back Mounting

Pull plates using #3, 4, or 10 pull types can be furnished with a flush back (no projections). Specify code FB, (i.e. 33 EFB).

NOTE: Use thru-bolts supplied with mountings for best security.



Engraving

Typical engraved lettering is in Helvetica Style and colored black. On push or pull plates, standard position is horizontal on a line 2" (51 mm) from top of plate.



Push/Pull Plates may be ordered with engraved lettering or special designs. Send a sketch or print with quotation request. Provide complete details for non-standard engraving. Other lettering styles and coloring may be specified subject to availability.

NOTE: Unless specified in product details, all catalog units are reversible-usable with any door swing. However, the method of fastening or engravings usually "hand" an otherwise reversible unit and require the "Hand of Door" when ordering.